

# Monitor-Well Locking




### Monitor-Well Locking Plug Features:

- Designed to seal monitor wells
- Meets all EPA requirements for locking plugs
- Sized to seal schedule 40 piping
- 2" and 4" sizes can also seal schedule 5 pipe
- Works with Cherne's solid brass padlock or a No. 2 Master® padlock

### Equipped with:

- Chemical and petroleum-resistant Estaloc™ plastic top and bottom plates
- Petroleum resistant nitrile o-ring
- Stainless steel carriage bolt
- Yellow chromate-coated locking latch

### Monitor-Well Plug Installed

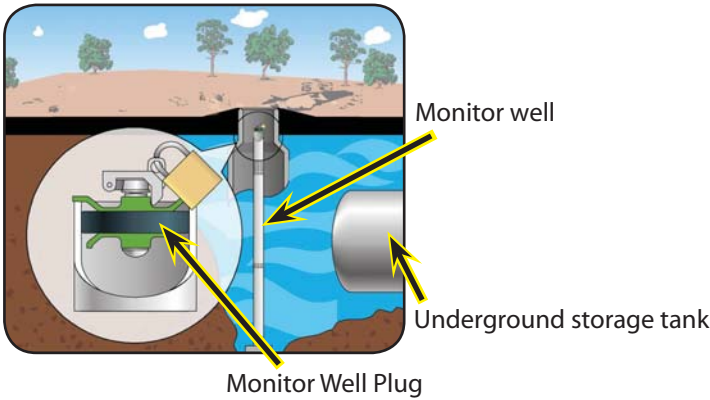

Part #	Nominal Size	Size Usage Range		Maximum Allowable Back Pressure		Product Specifications		
		Minimum Diameter	Maximum Diameter	Air Pressure PSI*	Head Pressure (Feet of Head)	Plug Size Diameter	Plug Size Length	Product Weight
<b>Monitor-Well Locking Plugs</b>								
271648	1" - 1.25" (25 - 30 mm)	1" (25 mm)	1.38" (35 mm)	6.5 (0,45 bar)	15 (4.5 M)	.98" (25 mm)	2.5" (64 mm)	4.7 oz (.14 kg)
271675	2" (50 mm)	1.9" (49 mm)	2.31" (59 mm)	6.5 (0,45 bar)	15 (4.5 M)	1.88" (48 mm)	2.5" (64 mm)	4.5 oz (.13 kg)
271669	3" (75 mm)	2.8" (71 mm)	3.1" (79 mm)	6.5 (0,45 bar)	15 (4.5 M)	2.75" (70 mm)	2.6" (66 mm)	7.5 oz (.21 kg)
271683	4" (100 mm)	3.8" (97 mm)	4.38" (111 mm)	6.5 (0,45 bar)	15 (4.5 M)	3.75" (95 mm)	3.0" (76 mm)	12.5 oz (.35 kg)
271691	6" (150 mm)	5.77" (147 mm)	6.08" (155 mm)	6.5 (0,45 bar)	15 (4.5 M)	5.73" (145 mm)	3.98" (101 mm)	2 lbs (.91 kg)
271735	8" (200 mm)	7.76" (197 mm)	8.03" (204 mm)	6.5 (0,45 bar)	15 (4.5 M)	7.73" (196 mm)	3.98" (101 mm)	3 lbs (1.22 kg)
112941	Cherne padlock (optional)	Brass construction and keyed alike						1.5 oz (.06 kg)

\* Always block plugs when conducting air tests!