




Jet-Ball® Pipeline Cleaning Balls:

- Inexpensive method for cleaning new lines prior to line acceptance testing
- Also for cleaning grease out of existing lines—the better alternative to an expensive jet truck
- Made of natural rubber


Equipped with:

- Eye bolts at each end for tethering
- Spiral grooves to create high-power spraying action for cleaning pipelines


Jet-Ball® Application

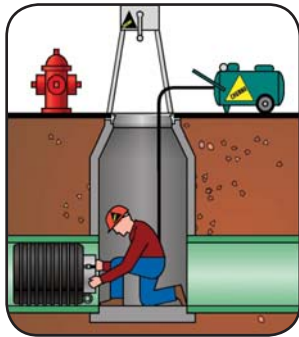

1) Install plug to isolate manhole

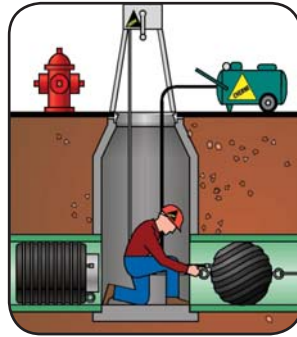

2) Attach Jet-Ball® to tag line and inflate

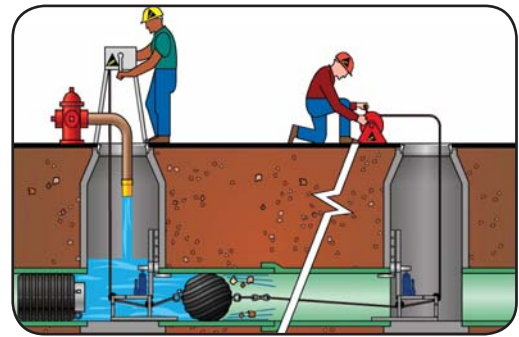

3) Introduce water into manhole and slowly release Jet-Ball® down the line.

Part #	Nominal Size	Size Usage Range		Maximum Allowable Back Pressure	Product Weight	Product Specifications				
		Minimum Diameter	Maximum Diameter			Head Pressure (Feet of Head)	Deflated		Inflation Valve Thread Size	Eye Bolt
							Length	Diameter		
254207	6" - 10" (150 - 250 mm)	5.87" (149 mm)	10.25" (260 mm)	5 (1.5 M)	2.5 lbs (1.1 kg)	8" (203 mm)	5.62" (142 mm)	¼"	⅜" (2)	
254215	10" - 14" (250 - 350 mm)	8.75" (222 mm)	14.25" (362 mm)	5 (1.5 M)	7.5 lbs (3.4 kg)	12.25" (311 mm)	8.5" (216 mm)	¼"	⅜" (2)	
254223	15" - 18" (375 - 450 mm)	11" (279 mm)	18.25" (464 mm)	5 (1.5 M)	13 lbs (5.9 kg)	14.75" (375 mm)	10.75" (273 mm)	¼"	⅜" (2)	