





Based on the popular Single-Size Test-Ball® design, one Multi-Size Test-Ball® plug works in up to three different pipe sizes—saving time, money, and shelf/truck space. Made from natural rubber with Cherne’s trademark ribbed design, the Multi-Size Test-Ball® plugs are durable, tear-resistant, and will work in any type of pipe—including out-of-round pipe. *The 276 series plugs are ideal for most residential applications; the 275 series plugs are designed with sewer and underground applications in mind.*

### Plumbing Applications



Closet bend




Sanitary tee



Floor drain

### Sewer Application

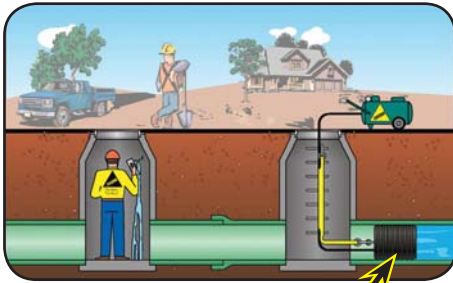

Blocking sewer flow

### Features:

- One plug for multiple pipe sizes means fewer tools on the job and less inventory on the shelf
- The 276 series plugs come with an over-sized ring and 12” chain to anchor plug and prevent loss down pipe
- The 275 series plugs have an eye bolt for plug installation and removal
- Multi-size Test-Ball® plugs are ideal for both blocking sewer flow and for use as a back plug in low-pressure air tests

Part #	Nominal Size	Size Usage Range		Maximum Allowable Back Pressure		Product Specifications				
		Minimum Diameter	Maximum Diameter	Air Pressure PSI*	Head Pressure (Feet of Head)	Required Inflation Pressure	Product Weight	Deflated		Inflation Valve Thread Size
								Length	Diameter	
<b>Multi-Size Test Ball® Plugs: Plumbing Applications (276 Series)</b>										
276128	1¼" - 2" (32 - 50 mm)	1.25" (32 mm)	2.1" (53 mm)	17 (1,2 bar)	40 (12 M)	40 (2,8 bar)	3.7 oz (.11 kg)	5.56" (141 mm)	1.21" (31 mm)	Molded in valve with cap
276238	2" - 3" (50 - 75 mm)	1.9" (48 mm)	3.1" (80 mm)	17 (1,2 bar)	40 (12 M)	35 (2,4 bar)	4.7 oz (.13 kg)	5.57" (141 mm)	1.78" (45 mm)	Molded in valve with cap
276348	3" - 4" (75 - 100 mm)	2.8" (70 mm)	4.1" (104 mm)	17 (1,2 bar)	40 (12 M)	40 (2,8 bar)	7.8 oz (.22 kg)	5.18" (132 mm)	2.64" (67 mm)	Molded in valve with cap
276468	4" - 6" (100 - 150 mm)	3.4" (87 mm)	6.1" (155 mm)	17 (1,2 bar)	40 (12 M)	30 (2,1 bar)	1.4 oz (.62 kg)	9.47" (241 mm)	3.28" (83 mm)	Molded in valve with cap
<b>Multi-Size Test Ball® Plugs: Sewer Applications (275 Series)</b>										
275048	4" - 6" (100 - 150 mm)	3.75" (92 mm)	6.25" (159 mm)	17 (1,2 bar)	40 (12 M)	40 (2,8 bar)	2 lbs (.91 kg)	10.25" (250 mm)	3.5" (85 mm)	¼" removable
275058	6" - 8" (150 - 200 mm)	5.25" (140 mm)	8.25" (210 mm)	17 (1,2 bar)	40 (12 M)	35 (2,4 bar)	3.5 lbs (1.6 kg)	14" (356 mm)	4.5" (114 mm)	¼" removable
275088	8" - 12" (200 - 300 mm)	7.00" (178 mm)	12.25" (311 mm)	11 (0,75 bar)	25 (8 M)	20 (1,4 bar)	6.63 lbs (3 kg)	16" (406 mm)	6.75" (171 mm)	¼" removable
275128	12" - 18" (300 - 450 mm)	10.75" (273 mm)	18.25" (464 mm)	11 (0,75 bar)	25 (8 M)	25 (1,7 bar)	22.4 lbs (10.2 kg)	24" (610 mm)	10.5" (267 mm)	¼" removable

\*Always block plugs when conducting air tests!